

Thermomirror Mirror Demister

Ultra-thin Demister Pad for use on Bathroom Mirrors

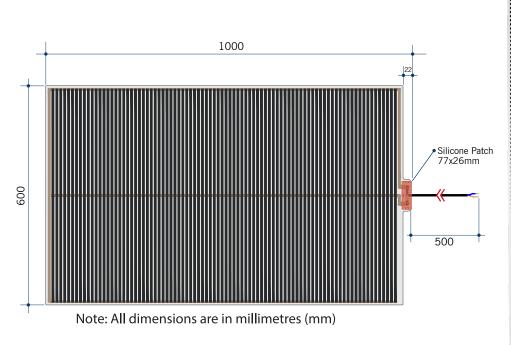

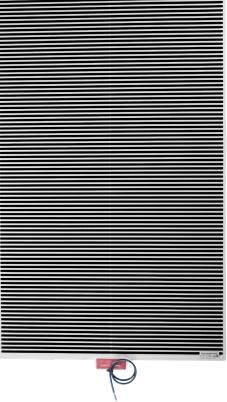

Stock Code	Size (mm)		Heat Output (W)		Voltage - Frequency	
 TM6010	600 x 1000	C	145		220 - 240V 50Hz	
10 LEN VEAR WARRAND	240V	IP6	A A A A A A A A A A A A A A A A A A A	NUME PAD THICHNEY 0.6MM ↑		<u>5.5MM</u>
35-40°C	FULLY SELF-ADHEO	€ 500M	\sum	DUBLE INSULATED		NADE IN EUROPA

Thermomirror demisters must be installed by a qualified electrican. The demister cannot be cut, pierced or modified in anyway.



1300 368 631 sales@thermogroup.com.au www.thermogroup.com.au

